

FOR YOUR SAFETY WARING


Risk of Fire, Consult a qualified electrician to ensure correct branch circuit conductor. Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.

General


All electrical connections must be in accordance with local and National Electrical Code(N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician. Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

Installation Steps:

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Outlet Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Hold the mounting plate up against ceiling outlet box, aligning the outlet box two thread holes and adjust to the appropriate location, use a pencil to mark the anchor screw holes, remove the mounting plate, then drilled holes and loaded plastic anchors. Attach the mounting plate to the outlet box with the two outlet box screws and anchor screws as shown.
- The outlet box is not included.**
4. **NOTE: make wires connections:**
 - **Attach fixture ground wire to supply ground wire using a wire nut or attach them to them mounting plate with a green ground screw.
 - **Attach fixture white wire from lamp body to supply white wire or ridge wire from power source with a wire nut.
 - **Attach fixture black wire from lamp body to supply black wire or smooth wire from power source with a wire nut.
 - **Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.
5. Make sure all wire connectors are secured and do not easily pull off with the slight tug. After wires are connected, tuck them carefully inside the Outlet Box.
6. Take the magnetic LED illuminant and place it on the ceiling mounting plate, then plug it into the power plug that you connected to the power supply in the outlet box.
7. Can change color temperature by switch the button on the LED module.
8. Attach the assembled shade onto the ceiling mounting plate, aligning the top slots of shade with the mounting plates studs, rotate the shade until the studs are seat in the slots.
9. Your installation is now complete. Return power to the outlet box and test the lamp body.

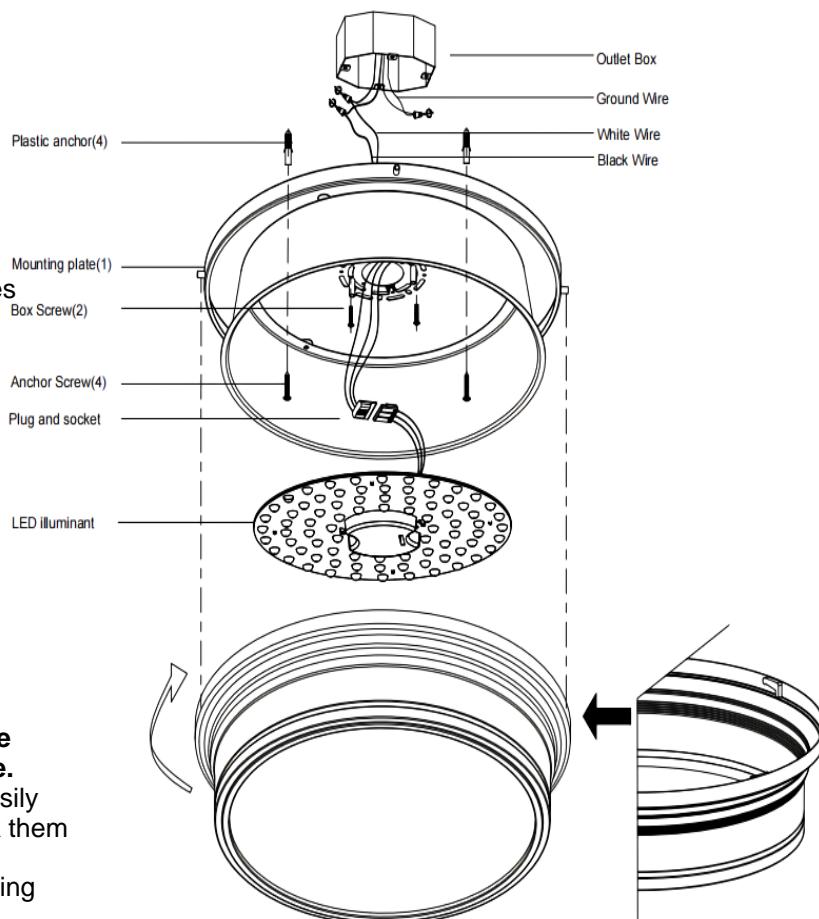

can change color temperature from 2700K/3000K/3500K/4000K/5000K.

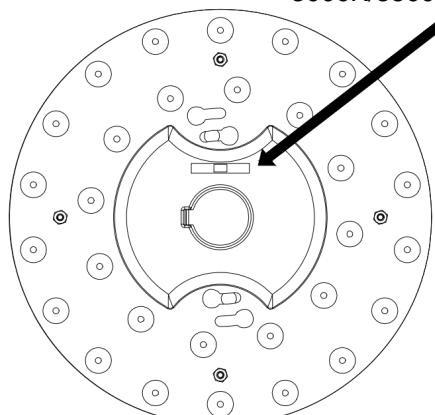

Recommended Dimmer list

No.	Brand	Item No.	Feature	Grade	Dimming Range
1	Lutron	Dvcl-153P-Wh	150W 1.25A Dimmable Led, Cfl, 600W Incandescent /Halogen	Compatiable	10-100%
2	Lutron	Dvscl-153P-Es	150W 1.25A Dimmable Led, Cfl, 600W Incandescent /Halogen	Compatiable	10-100%
3	Lutron	Dvcl-253P-Wh	250W 2.0A Dimmable Led, Cfl, 600W Incandescent /Halogen	Compatiable	10-100%
4	Lutron	Dvelv-300P-Wh	300W Single-Pole Preset Dimmer	Compatiable	10-100%
5	Lutron	Pd-6Wcl, Caseta Wireless Dimmer	100W 1.25A Dimmable Led, Cfl, 600W Incandescent /Halogen, Wifi	Compatiable	10-100%
6	Lutron	Ctcl-153P-IV	150W 1.25A Dimmable Led, Cfl, 600W Incandescent /Halogen	Compatiable	10-100%
7	Lutron	S-600P-Wh	600W Halogen/Incandescent Dimmer	Compatiable	10-100%
8	Lutron	Selv-300P-IV	300W Preset Dimmer	Compatiable	10-100%
9	Lutron	Aycl-253P-Wh	250W 2.0A Dimmable Led, Cfl, 600W Incandescent /Halogen	Compatiable	10-100%
10	Lutron	Macl-153M-Wh	150W 1.25A Dimmable Led, Cfl, 600W Incandescent /Halogen	Compatiable	10-100%
11	Lutron	Dvwcl-153Ph-Wh	150W, 1.25A White, Compact Fluorescent Light/Led Or 600W	Compatiable	10-100%
12	Copper	Sal06P	300W 2.5A Dimmable Led, Cfl, 600W Incandescent /Halogen	Compatiable	10-100%
13	Leviton	6672	150W 1.25A Dimmable Led, Cfl,	Compatiable	10-100%
14	Leviton	Ipl06-10Z	150W 1.25A Dimmable Led, Cfl,	Compatiable	10-100%
15	Leviton	Dsm10-1Lz	450W 3.75A Dimmable Led, Cfl, 600W Incandescent /Halogen	Compatiable	10-100%
16	Leviton	6674	150W 1.25A Dimmable Led, Cfl,	Compatiable	10-100%
17	Leviton	6633	150W 1.25A Dimmable Led, Cfl, 600W Incandescent /Halogen	Compatiable	10-100%
18	Legrand	Rhcl453Pw	450W 3.75A Dimmable Led, Cfl,	Compatiable	10-100%
19	Legrand	Adpd453Lm2	150W 1.25A Dimmable Led, Cfl, 600W Incandescent /Halogen	Compatiable	10-100%
20	Eaton	Tal06P2-C2	300W 2.5A Dimmable Led, Cfl, 600W Incandescent /Halogen, Wifi	Compatiable	10-100%
21	Feit	72309	150W 1.25A Dimmable Led, Cfl, 600W Incandescent /Halogen	Compatiable	10-100%