


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirements.

## Installation Steps:

- Carefully unpack your new fixture and lay out all the parts on clear area. Take care not to lose any small parts necessary for installation.
- Assemble the threaded nipple(A) onto the cross bar and lock it in place with hex nut. Attach the crossbar assembly to outlet box by using two outlet box screws upwards. Secure the screw collar onto the threaded nipple(A).
- Assemble the threaded nipple(B) to the bottom center hex coupling of round box, lock it with the hex nut. Attach the arm's pipe thread to the round box's hole, feed the end of wires through the spring shim and spring washer, lock it securely with the hex nut, assemble others arm using the same method.
- Make wire connections (1950-4C one group of wiring, 1950-5C two groups of wiring, 1950-9C four groups of wiring):
  - \*Attach the socket white wire to white wire or power cord's ribbed wire(neutral) secure with a wire nut.
  - \*Attach the socket black wire to black wire or power cord's smooth wire(hot) secure with a wire nut.
  - \*Observing: neutral, white wire with white wire or ribbed wire; hot, black wire with black wire or smooth wire. Make sure all wire connectors are secured and do not easily pull off with the slight tug, you must have to wrap the connections wire nut with electrical tape and bind the wires by ties.
- Attach the cover to the bottom of round box and secure it with the finial(B).
- Raise the end screw of rod(4PCS) into the big ring's mounting hole, lock it securely with the finial(A). Assemble others rod and cross ring using the same method.
- Feed the wires through the pipe thread(B), glass pipe(B), cross ring's coupling, pipe thread(A), glass pipe(A) and fixture loop, by turn them clockwise until tight, not too tight it.
- Determine the length of chain needed, using pliers to disconnect the unneeded chain. Connect desired chain length using chain links.
- Weave the fixture wires including ground wire through fixture loop, every other chain, screw collar, collar ring, canopy and threaded nipple(A) on the cross bar. Put one chain link on the fixture loop and the other one on screw collar.
- Make wire connections:
  - \*Attach ground wire to house ground wire using a wire nut or attach them to the cross bar with a green ground screw.
  - \*Attach white or ribbed wire(neutral) from light to white wire from power source with a wire nut.
  - \*Attach black or smooth wire(hot) from light to black wire from power source with a wire nut.
  - \*Observing: ground wire with ground wire, neutral wire with neutral wire, hot wire with hot wire.
  - \*Make sure all wire connectors are secured and do not easily pull off with the slight tug.
- Tuck the wires connections neatly into the outlet box.
- Attach the canopy to the ceiling then thread the collar ring on screw collar to secure the canopy.
- Attach the candle sleeves and shades to the socket.
- Install bulbs. (not included) (Please do not exceed the maximum capacity which is recommended on the fixture.) Turn on the power at the fuse or circuit box.

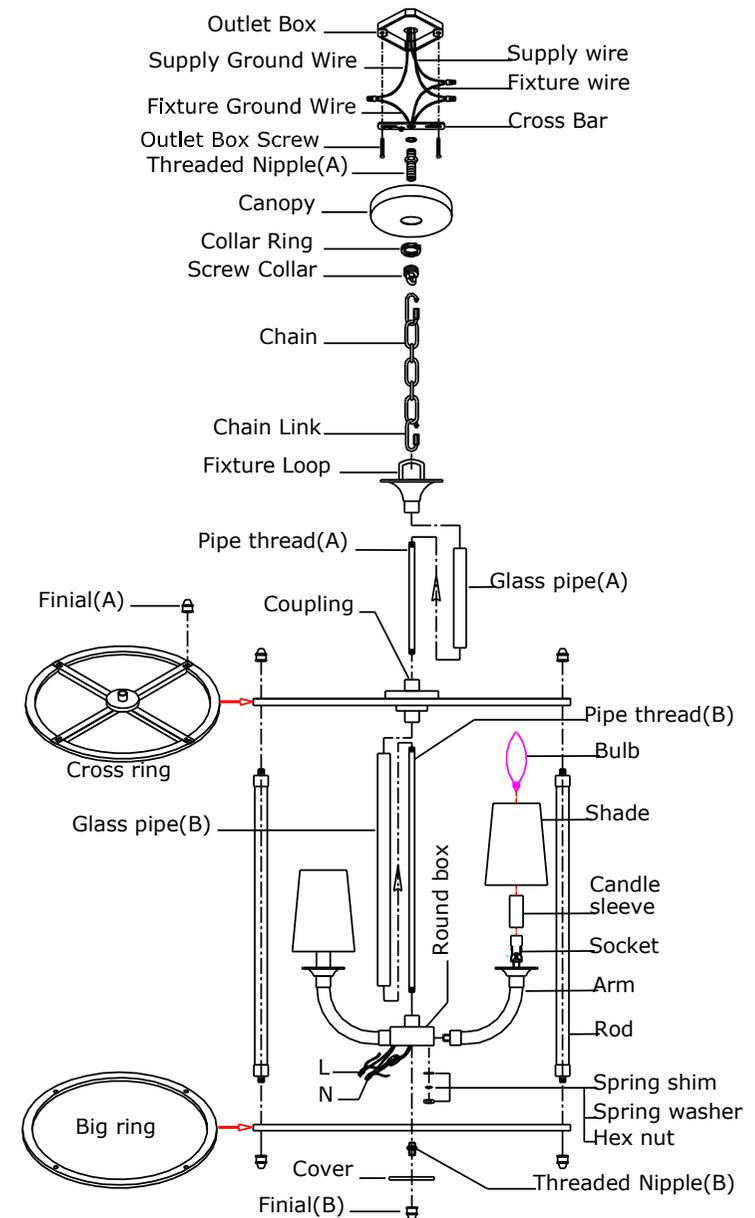

1950-4C(One group of wiring)  
 1950-5C(Two groups of wiring)  
 1950-9C(Four groups of wiring)