

ASSEMBLY AND INSTALLATION INSTRUCTION

WARNING: SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER!

NOTE: BEFORE INSTALLING, CONSULT LOCAL ELECTRICAL CODES FOR WIRING AND GROUNDING REQUIREMENT.

Installation Steps:

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Outlet Box. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Thread the two mounting screws into the pre-drilled holes in the mounting plate spaced the same distance apart as the holes in the canopy. Attach the mounting plate to the outlet box with the two box screws as shown. The side of the mounting plate marked "GND" must face to out. The junction box is not included.
3. **See the Fig.1.** Attach the Glass into the Frame, fixed with the Iron shims.
4. **See the Fig.2.** Raise the Arm set and Clips onto the top corner of frame, aim mounting holes, lock it securely with the Ball Nut. Feed the wires from lamp holder through the pipe, arm's center hole and canopy, lock them securely with Hex Nut.
5. Take this assembly lamp body to ceiling outlet box, connect the electrical wires.

Make wire connections:

--attach fixture ground wire to supply ground wire using a wire nut or attach them to the mounting plate with a green ground screw.

--attach white wire from light to white wire from power source with a wire nut.

--attach black wire from light to black wire from power source with a wire nut.

Observing: ground wire with ground wire, neutral wire with neutral wire, hot wire with hot wire.

*****Make sure all wire connectors are secured and do not easily pull off with the slight tug.**

6. Once all wires are connected, tuck them carefully into outlet box. Attach the canopy to the ceiling, lock it securely with the Ball Nut. Raise the candle sleeve to the lamp holder.
7. Install bulbs.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)
8. Turn on the power at fuse or circuit box.

NOTE: To clean, wipe fixture with a damp soft cloth. Then dry immediately with a dry soft cloth. Clean glass with a mild soap. DO NOT use chemical cleaners or abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

Fig.1

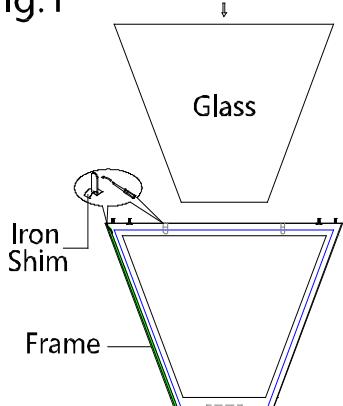


Fig.2


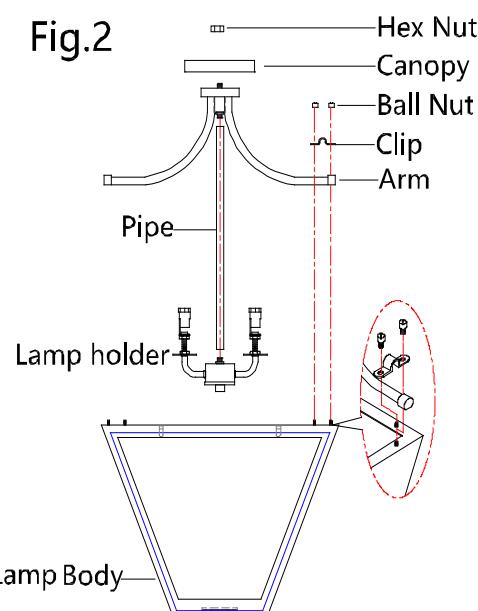


Fig.3

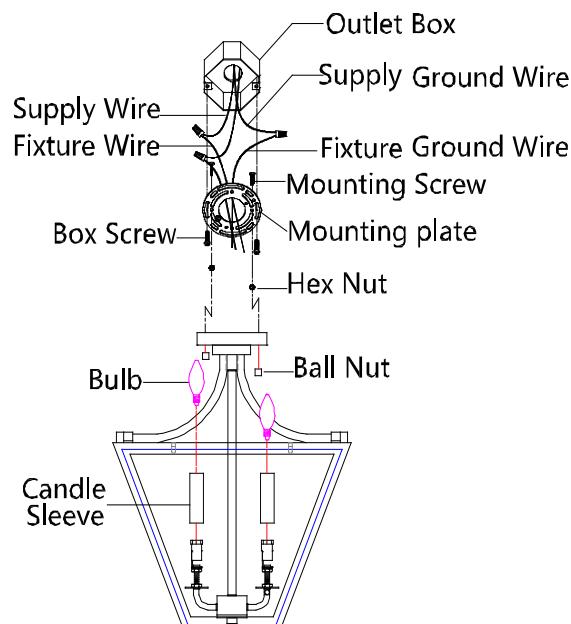

1961-3C

1961-4C

 **Z-Lite**
Est. 1987