

ASSEMBLY AND INSTALLATION INSTRUCTION

WARNING: SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER!

NOTE: BEFORE INSTALLING, CONSULT LOCAL ELECTRICAL CODES FOR WIRING AND GROUNDING REQUIREMENT.

Installation Steps:

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Outlet Box. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
2. Assemble the threaded nipple onto the cross bar and lock it in place by hex nut. Attach the cross bar to outlet box by using two outlet box screws upwards. The side of the mounting plate marked "GND" must face to out.
3. **See the Fig.1.** Attach the Glass into the Frame, fixed with the Iron shims.
4. **See the Fig.2.** Raise the Arm set and Clips onto the top corner of frame, aim mounting holes, lock it securely with the Ball nut. Feed the wires from lamp holder through the two pipes, arm's center hole and fixture loop, by turn it clockwise until tighten.
5. Determine the length of chain needed, using pliers to disconnect the unneeded chain. Connect desired chain length using chain links. Put one chain link on the fixture loop and the other one on screw collar.
6. Weave the fixture wires including ground wire through fixture loop, every other chain, screw collar, collar ring, canopy, and threaded nipple on the cross bar. Secure the screw collar onto the threaded nipple.

7. Make wire connections:

- attach fixture ground wire to supply ground wire using a wire nut or attach them to the mounting plate with a green ground screw.
- attach white wire from light to white wire from power source with a wire nut.
- attach black wire from light to black wire from power source with a wire nut.

Observing: ground wire with ground wire, neutral wire with neutral wire, hot wire with hot wire.

*****Make sure all wire connectors are secured and do not easily pull off with the slight tug.**

8. Once all wires are connected, tuck them carefully into outlet box. Attach the canopy to the ceiling then thread the collar ring on screw collar to secure the canopy. Raise the candle sleeve to the lamp holder.
9. Install bulbs.(not included) (Please do not exceed the maximum capacity which is recommended on the fixture.)

10. Turn on the power at fuse or circuit box.

NOTE: To clean, wipe fixture with a damp soft cloth. Then dry immediately with a dry soft cloth. Clean glass with a mild soap. DO NOT use chemical cleaners or abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

Fig.1

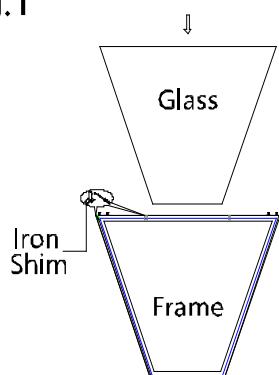


Fig.3


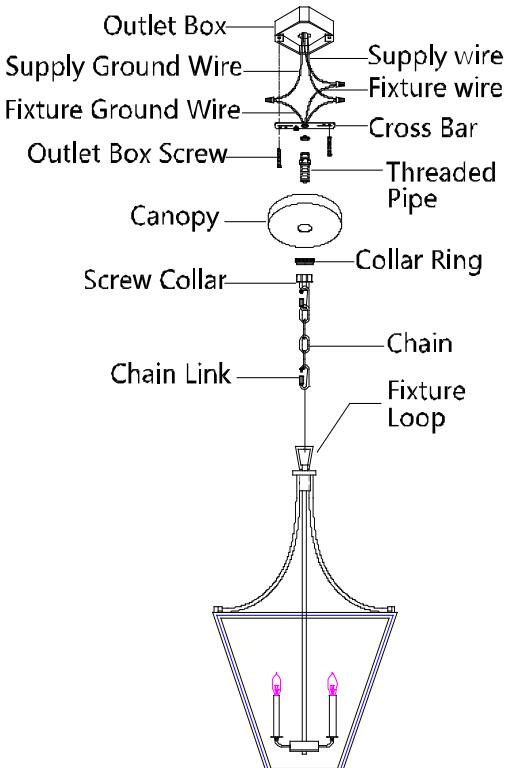


Fig.2

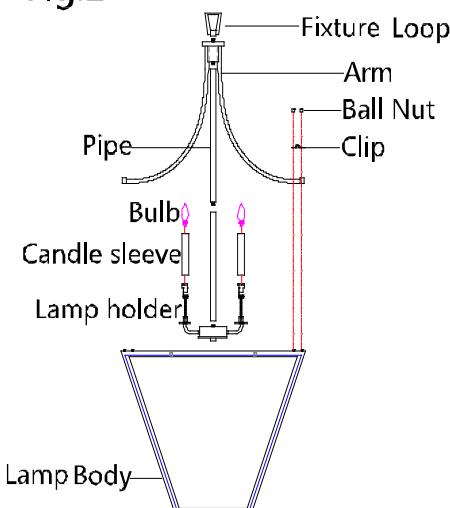

1961-6

1961-8

 **Z-Lite**
Est. 1987