

## MINI PENDANT FIXTURE INSTALLATION INSTRUCTIONS

*Please read carefully and save these instructions, as you may need them at a later date.*

### CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

### GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.


### ASSEMBLY AND INSTALLATION

1. Thread the HEX NUTS (4) onto the FIXTURE MOUNTING SCREWS (5), and screw the SCREWS (5) onto the MOUNTING BRACKET (2), without tightening the HEX NUT (4).
2. Pull the power supply wires out from the OUTLET BOX (1), and mount the MOUNTING BRACKET (2) to the OUTLET BOX (1), using MOUNTING SCREWS (3).
3. Place the CANOPY (13) of the fixture over the OUTLET BOX (1) and onto the FIXTURE MOUNTING SCREWS (5), and adjust the HEX NUTS (4) until it protrudes 1/4" out from the CANOPY (13). Remove the CANOPY (13) and secure the position of the SCREWS (5) by tightening the HEX NUT (4) against the MOUNTING BRACKET (2).
4. Attach the BLACK SUPPLY WIRE (6) to the SMOOTH FIXTURE LEAD WIRE (9) by using the WIRE CONNECTOR (12). In the same manner, attach the WHITE SUPPLY WIRE (8) to the RIBBED FIXTURE LEAD WIRE (10). Connect the FIXTURE GROUND WIRE (11) to the SUPPLY GROUND WIRE (7) using a WIRE CONNECTOR (12).
5. Place the CANOPY (13) back onto the FIXTURE SCREWS (5), and secure into place using the DECORATIVE NUTS (14) provided.

### ASSEMBLY AND INSTALLATION (Continued)

6. Screw the 12" TUBES (16) together using the NIPPLES (17), then attach the TUBES (16) to the SWIVEL (15). Attach the other end of the TUBE (16) to the COUPLING (18) that is part of the SHADE HOLDER (19), slide the GLASS SHADE (21) over the SOCKET (20), then screw on the SOCKET RING (22).
7. Screw light bulbs into the lamp sockets and make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label.

INSTALLATION IS NOW COMPLETED

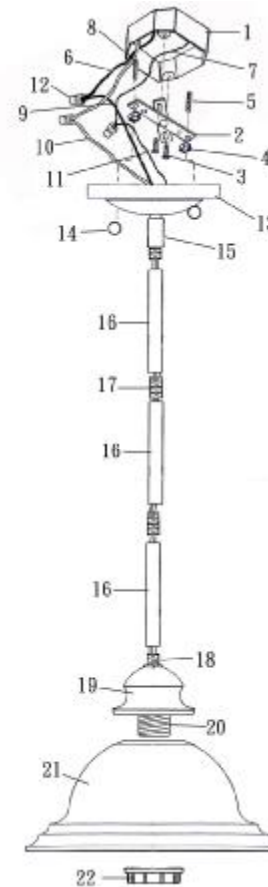

1. OUTLET BOX
2. MOUNTING BRACKET
3. MOUNTING SCREW
4. HEX NUT
5. FIXTURE MOUNTING SCREW
6. BLACK SUPPLY WIRE
7. SUPPLY GROUND WIRE
8. WHITE SUPPLY WIRE
9. SMOOTH FIXTURE LEAD WIRE
10. RIBBED FIXTURE LEAD WIRE
11. FIXTURE GROUND WIRE
12. WIRE CONNECTOR
13. CANOPY
14. DECORATIVE NUT
15. SWIVEL
16. 12" TUBE
17. NIPPLE
18. COUPLING
19. SHADE HOLDER
20. SOCKET
21. GLASS SHADE
22. SOCKET RING