

ASSEMBLY AND INSTALLATION INSTRUCTIONS




WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirement.


Installation Steps:

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Outlet Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Hold the mounting plate up against ceiling outlet box, aligning the outlet box two thread holes and adjust to the appropriate location, use a pencil to mark the anchor screw holes, remove the mounting plate, then drilled holes and loaded plastic anchors. Attach the mounting plate to the outlet box with the two outlet box screws and anchor screws as shown. The side of the mounting plate marked "GND" must face to out. **The outlet box is not included.**
4. **NOTE: make wires connections:**
 - **Attach fixture ground wire to supply ground wire using a wire nut or attach them to them mounting plate with a green ground screw.**
 - **Attach fixture white wire from lamp body to supply white wire or ridge wire from power source with a wire nut.**
 - **Attach fixture black wire from lamp body to supply black wire or smooth wire from power source with a wire nut.**
 - **Observing: positive wire with positive wire, negative wire with negative wire, ground wire with ground wire.**
5. Make sure all wire connectors are secured and do not easily pull off with the slight tug. After wires are connected, tuck them carefully inside the Outlet Box.
6. Take the magnetic LED illuminant and place it on the ceiling mounting plate, , then plug it into the power plug that you connected to the power supply in the outlet box..
7. Attach the assembled shade onto the ceiling mounting plate, aligning the top studs of shade with the mounting plate's slots, now, rotate the shade until the studs are seat in the slots.
8. Your installation is now complete. Return power to the outlet box and test the lamp body.

"To clean, wipe fixture with a damp soft cloth. Then dry immediately with a dry soft cloth. Clean glass with a mild soap. DO NOT use chemical cleaners or abrasive materials such as scouring pads or powders, steel wool or abrasive paper."

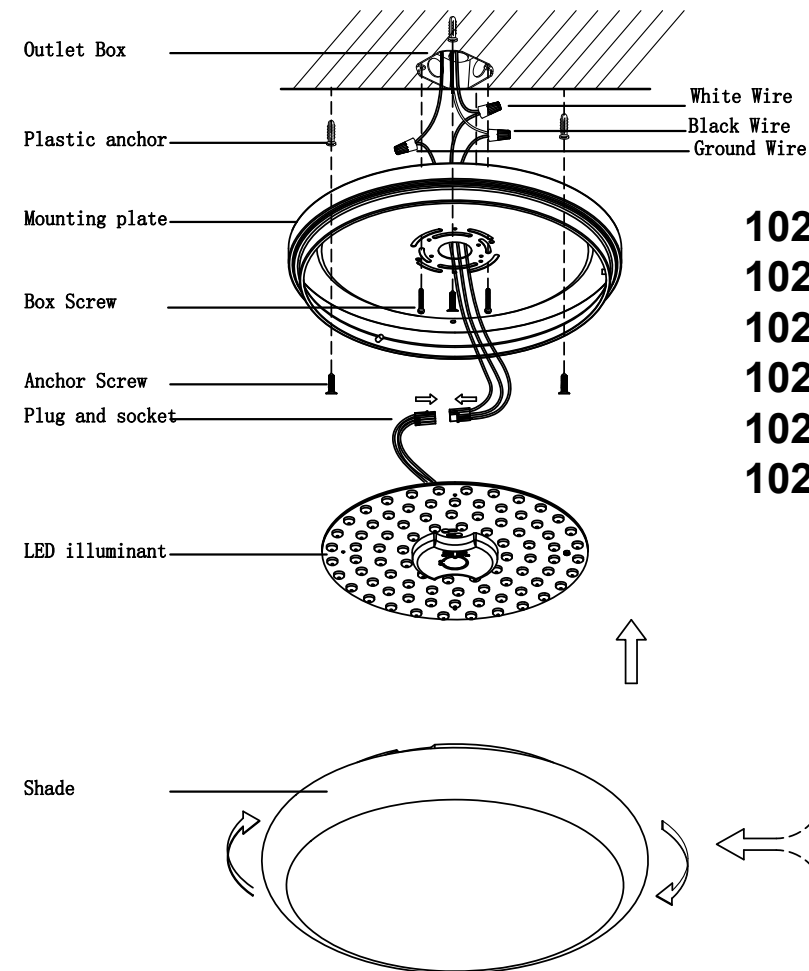

1025F12-XX-LED
1025F12-XXXX-LED
1025F16-XX-LED
1025F16-XXXX-LED
1025F20-XX-LED
1025F20-XXXX-LED



Recommended Dimmer list

No.	Brand	Item No.	Feature	Grade	Dimming Range
1	Lutron	DVCL-153P-WH	150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen	Compatiable	10-100%
2	Lutron	DVSCCL-153P-ES	150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen	Compatiable	10-100%
3	Lutron	DVCL-253P-WH	250W 2.0A Dimmable LED, CFL, 600W Incandescent /Halogen	Compatiable	10-100%
4	Lutron	DVELV-300P-WH	300W Single-Pole Preset dimmer	Compatiable	10-100%
5	Lutron	PD-6WCL, Caseta Wireless dimmer	100W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen, WIFI	Compatiable	10-100%
6	Lutron	CTCL-153P-IV	150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen	Compatiable	10-100%
7	Lutron	S-600P-WH	600W Halogen/Incandescent Dimmer	Compatiable	10-100%
8	Lutron	SELV-300P-IV	300W Preset dimmer	Compatiable	10-100%
9	Lutron	AYCL-253P-WH	250W 2.0A Dimmable LED, CFL, 600W Incandescent /Halogen	Compatiable	10-100%
10	Lutron	MACL-153M-WH	150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen	Compatiable	10-100%
11	Lutron	DVWCL-153PH-WH	150W, 1.25A White, Compact Fluorescent Light/LED Or 600W	Compatiable	10-100%
12	Copper	SAL06P	300W 2.5A Dimmable LED, CFL, 600W Incandescent /Halogen	Compatiable	10-100%
13	Leviton	6672	150W 1.25A Dimmable LED, CFL,	Compatiable	10-100%
14	Leviton	IPL06-10Z	150W 1.25A Dimmable LED, CFL,	Compatiable	10-100%
15	Leviton	DSM10-1LZ	450W 3.75A Dimmable LED, CFL, 600W Incandescent /Halogen	Compatiable	10-100%
16	Leviton	6674	150W 1.25A Dimmable LED, CFL,	Compatiable	10-100%
17	Leviton	6633	150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen	Compatiable	10-100%
18	Legrand	RHCL453PW	450W 3.75A Dimmable LED, CFL,	Compatiable	10-100%
19	Legrand	ADPD453LM2	150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen	Compatiable	10-100%
20	EATON	TAL06P2-C2	300W 2.5A Dimmable LED, CFL, 600W Incandescent /Halogen, WIFI	Compatiable	10-100%
21	FEIT	72309	150W 1.25A Dimmable LED, CFL, 600W Incandescent /Halogen	Compatiable	10-100%